

# CLEANROOM

## CLR01 - LED SEALED CLEANROOM FITTING




The Cleanroom from Vision Lighting is a recessed troffer with an IP54 rating, the Cleanroom is ideal for use in controlled areas such as banks, schools, universities, libraries and hospitals.

Constructed from a cold rolled steel housing with powder coated finish and PMMA reeded diffuser, the Cleanroom features quality componentry in the form of a Samsung driver and Osram LEDs.

The Cleanroom is available complete with mounting brackets and Australian flex and plug.

### PRODUCT SPECIFICATIONS

<b>Wattage:</b>	43W
<b>Lumens:</b>	3870Lm
<b>CCT:</b>	3000K / 4000K
<b>CRI:</b>	Ra>80
<b>Beam Angle:</b>	120 Degrees
<b>Dimming:</b>	DALI Available
<b>Material:</b>	Cold roll steel housing
<b>Diffuser:</b>	Y5 reeded
<b>Colour:</b>	White
<b>IP Rating:</b>	IP54
<b>Mounting:</b>	Plaster recessed
<b>Driver:</b>	Philips
<b>Light Source:</b>	Samsung

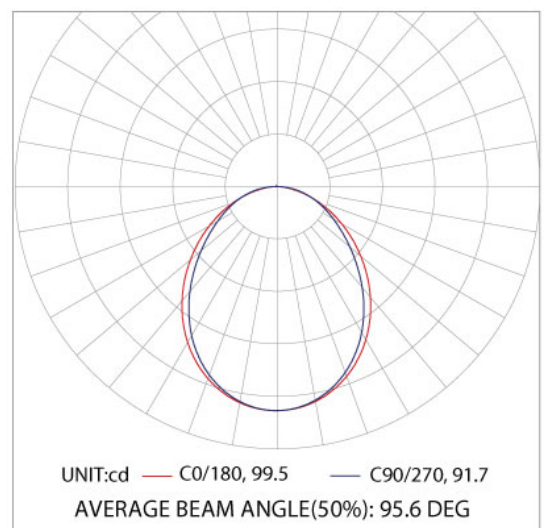


# CLEANROOM

## CLR01 - LED SEALED CLEANROOM FITTING

### CODING METHODOLOGY

Family	Size	Power	CCT	Dimming					
CLR01	-1230	1200 x 300mm	-43W	43W	3870Lm	-3K	3000K	(Blank)	None
	-6060	600 x 600mm				-4K	4000K	-DA	DALI Dimmable

### DIMENSIONAL DIAGRAM

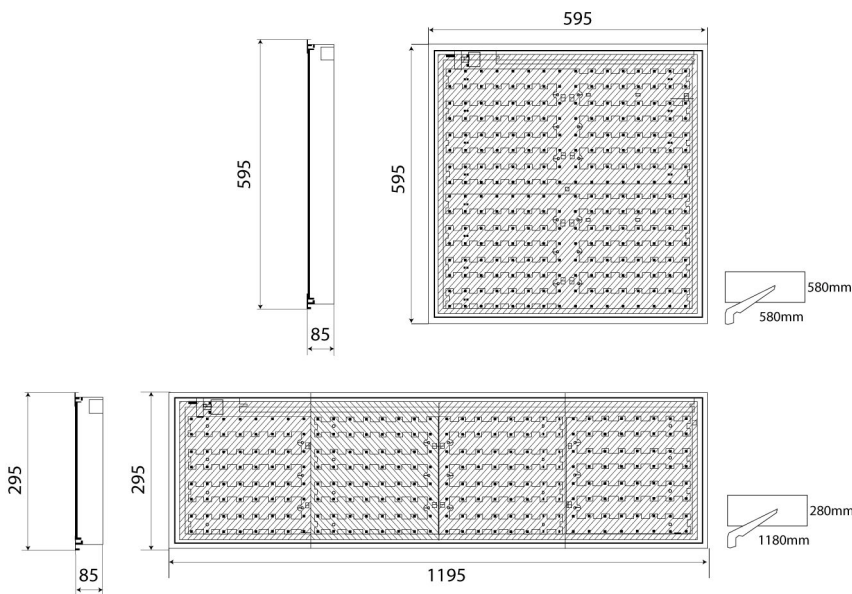

### MOUNTING BRACKET

The Vision Lighting Cleanroom is designed to not only achieve an IP54 rating for itself, but also to seal the ceiling space off from the room below.

The neoprene gasket around the light is held firmly in place by positive pressure from the screw-up mounting brackets.

