

BLISS D

DL140 - DIFFUSED LED DOWNLIGHT



Vision Lighting combines style and class to present the Bliss D range of downlights.


Constructed from a die-cast aluminium body, the Bliss D incorporates a clever thermal design for exceptional heat dissipation and longevity. Designed to include a high efficiency opal diffuser, the Bliss D provides even light distribution.

Available in a variety of wattages and colour options, the Bliss D offers a stylish downlighting option for hotel, apartment, office, retail, hospitality and education applications.



PRODUCT SPECIFICATIONS

Wattage:	10W / 15W / 23W / 30W
Efficacy:	~80Lm/W
CCT:	3000K / 4000K
CRI:	Ra80
Beam Angle:	~75 Degrees
Dimming:	DALI / 1-10V available
Material:	Cast Aluminium
Diffuser:	Polycarbonate
Trim Colour:	White / Black
IP Rating:	IP20 / IP44
Driver:	Tridonic
Light Source:	Osram Duris LED
Lifetime:	L80 > 60,000 hours

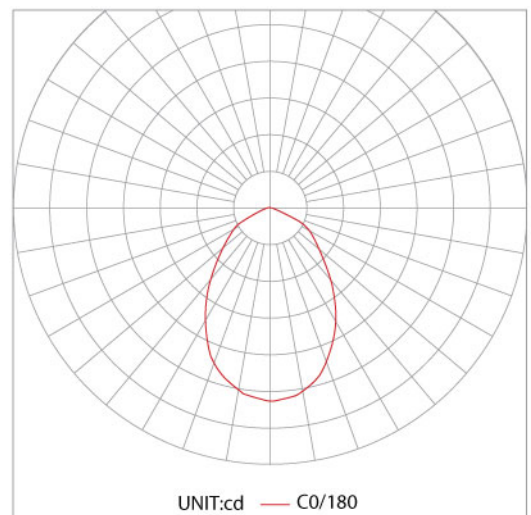

BLISS D

DL140 - DIFFUSED LED DOWNLIGHT

CODE BUILDER

Family	Power	Lumens	Cutout	CCT	IP rating	Colour	Trim	Reflector	Dimming				
DL140	-10	11.5W	900Lm	120mmØ	-3K	3000K	(Blank)	IP20	(Blank)	White	Silver	(Blank)	None
	-15	16.5W	1400Lm	165mmØ	-4K	4000K	-44	IP44	-B	Black	Silver	-DA	DALI
	-23	25W	2120Lm	190mmØ			-WG	White	Gold	-DV	1-10V		
	-30	32.5W	2725Lm	210mmØ			-BG	Black	Gold				

(Lumens stated are for 4000K)

DIMENSIONAL DIAGRAM

