

PULSAR

HLE34 - LED HIGHBAY



With a robust design and high output, the Pulsar highbay from Vision Lighting makes industrial lighting simple.


Constructed to IP65 from a die-cast aluminium body designed for optimal heat dissipation, the Pulsar incorporates high quality LED componentry including Meanwell driver and Philips LEDs for a >130Lm/W output.

Optional reflector accessories are available for a greater range beam angles. Perfect for industrial commercial applications, the Pulsar is suited for use in warehouses, factories, garages and workshops.



PRODUCT SPECIFICATIONS

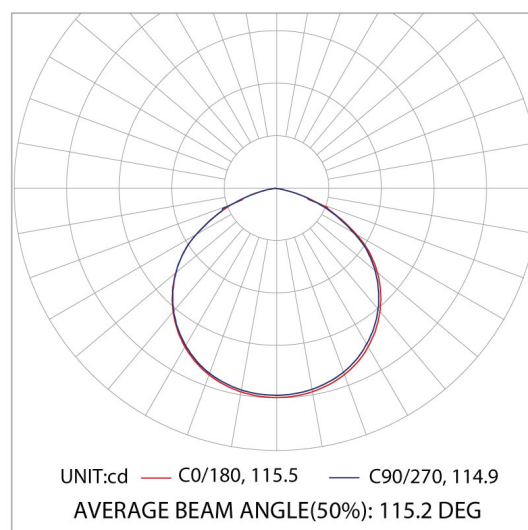

Wattage:	100 / 150 / 200 / 240W
Lumens:	~13000 / 19000 / 27500 / 30500Lm
Efficacy:	~130Lm/W
CCT:	4000K
CRI:	Ra>80
Beam Angle:	110° / 60° or 90° using reflector
Dimming:	DALI Available
Material:	Die-Cast Aluminium
IP Rating:	IP65
Mounting:	Hook Mount
Driver:	Meanwell
Light Source:	Philips
Lifetime:	50,000 hours



PULSAR


HLE34 - LED HIGHBAY

CODE BUILDER


Family	Power		Lumens	CCT		Beam angle		Dimming
HLE34	-100	100W	13123Lm	-4K 4000K		(Blank)	110 Degrees	(Blank) None
	-150	150W	19185Lm					
	-200	200W	27545Lm			-90	90 Degree PC Reflector	
	-240	240W	30696Lm			-60	60 Degree Alu Reflector	

DIMENSIONAL DIAGRAM

100W

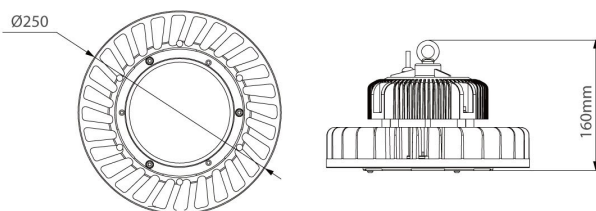

150W / 200W / 240W

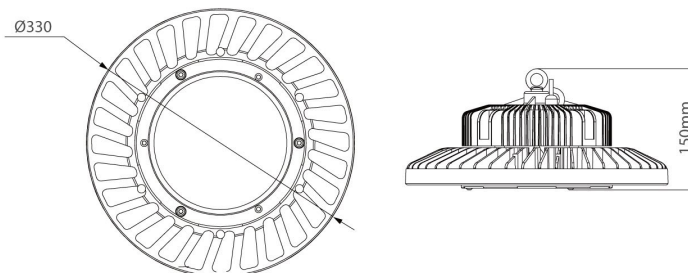

PULSAR

HLE34 - LED HIGHBAY

ATTACHMENTS AVAILABLE

As a standalone fitting, the HLE34 has a beam angle of 110 Degrees. Using the reflector attachments we are also able to achieve 60 degree and 90 degree beam angle for greater flexibility in design.

